

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
9 December 2004 (09.12.2004)

PCT

(10) International Publication Number
WO 2004/106880 A1

(51) International Patent Classification⁷: **G01L 19/08**,
G01P 13/00

(21) International Application Number:
PCT/DK2004/000374

(22) International Filing Date: 28 May 2004 (28.05.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PA 2003 00817 2 June 2003 (02.06.2003) DK

(71) Applicant (for all designated States except US): DAN-
FOSS A/S [DK/DK]; DK-6430 Nordborg (DK).

(72) Inventor; and

(75) Inventor/Applicant (for US only): RASMUSSEN, Per,
Brandt [DK/DK]; Padholm 6, DK-6440 Augustenborg
(DK).

(74) Common Representative: DANFOSS A/S; Patent De-
partment, DK-6430 Nordborg (DK).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- with amended claims

[Continued on next page]

(54) Title: A PRESSURE INDICATOR

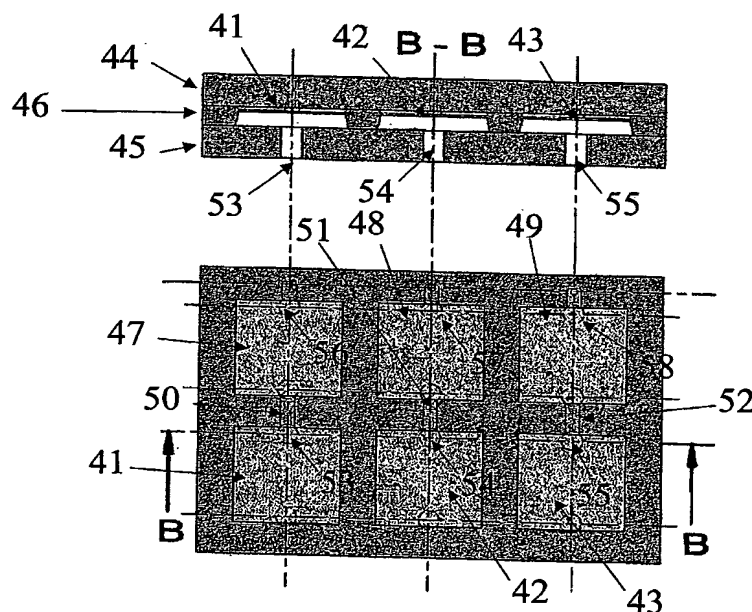

(57) Abstract: The invention provides an indicator for indicating a pressure difference. The indicator has a reference pressure chamber with two flexible wall parts being influenced to deflect upon pressures P1 and P2. The deflection of the wall parts changes a distance between each of the wall parts and an inflexible wall part of the chamber and by inspecting the difference, a pressure difference between P1 and P2 can be determined. To enable visual inspection, the chamber can be filled with an optically detectable fluid and one of the wall parts could be transparent to allow visual reading by determining a colour of the fluid layer below the transparent part.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.